

FHC Series




CHARACTERISTICS

- Low Rdc with flat wire design
- Low cooper losses at high frequency
- Magnetic shielded structure
- Quantity: 400pcs

APPLICATION

- High current DC/DC converter
- LC filter

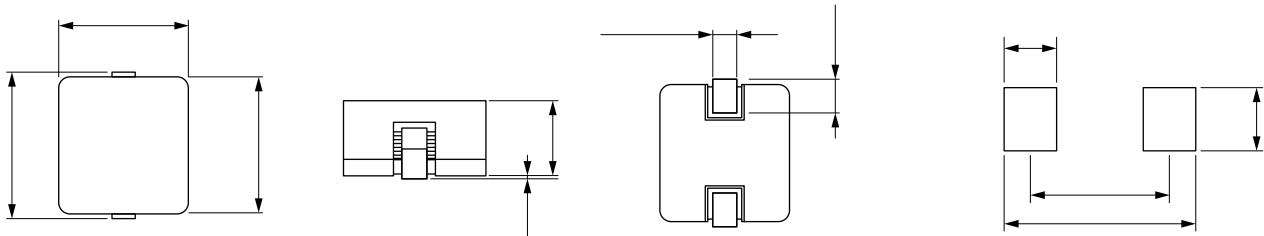

	Saturation			
(μH)	(A)	(A)	(mΩ)	(mΩ)

Test Frequency : Inductance : 100KHz /0.1V.

Operating Temperature : -40 °C °C

Temperature Rise Current: the actual value of DC current when the temperature rise is $\Delta T 50^{\circ}\text{C}$

Saturation Current that will cause initial inductance to drop approximately 30%

