



# Common Mode Filter Size 3216



Dimensions: [mm]




Schematic:

Electrical Properties:

# Typical Electrical Characteristics:

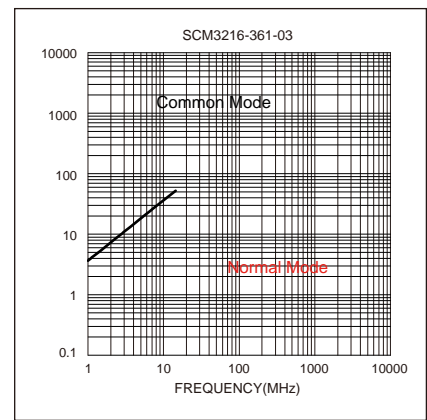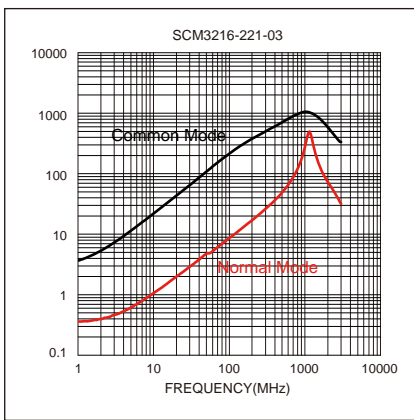

## Soldering Reflow:

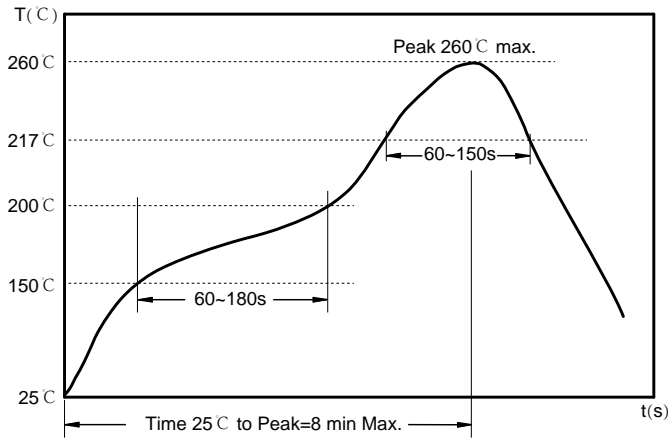

Preheat condition: 150 ~200 °C / 60~180 sec.

Allowed time above 217 °C: 60~150 sec.

Max temperature: 260 °C.


## Packaging Information:

### Tape Dimension:




Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
SCM3216	1.88 typ.	3.50 typ.	1.5±0.1	4.0±0.1	4.0±0.1	8.0±0.3	2.1 typ.	1.75±0.1	0.22±0.1

Peel force of top cover tape:

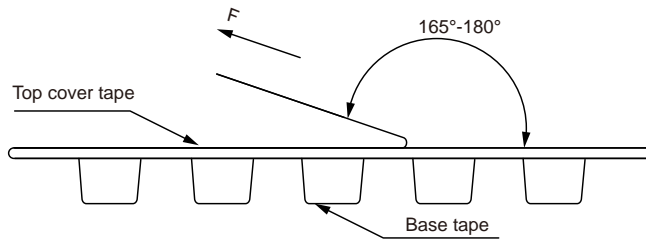


The peel force of top cover tape shall be between 0.1 to 1.0 N

Reel Dimension: [mm]

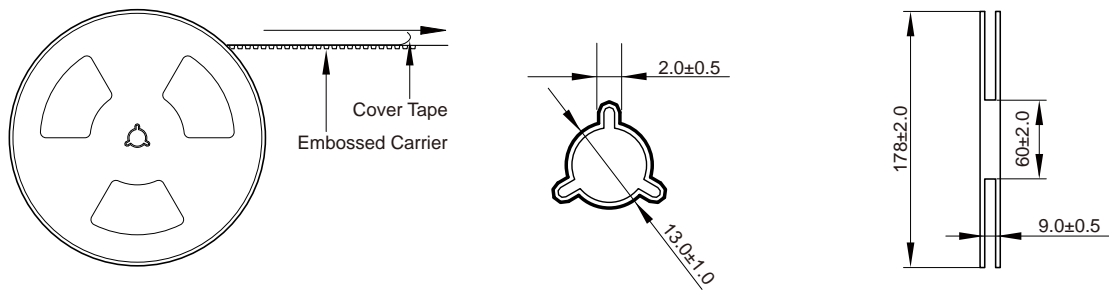

Packaging Quantity:

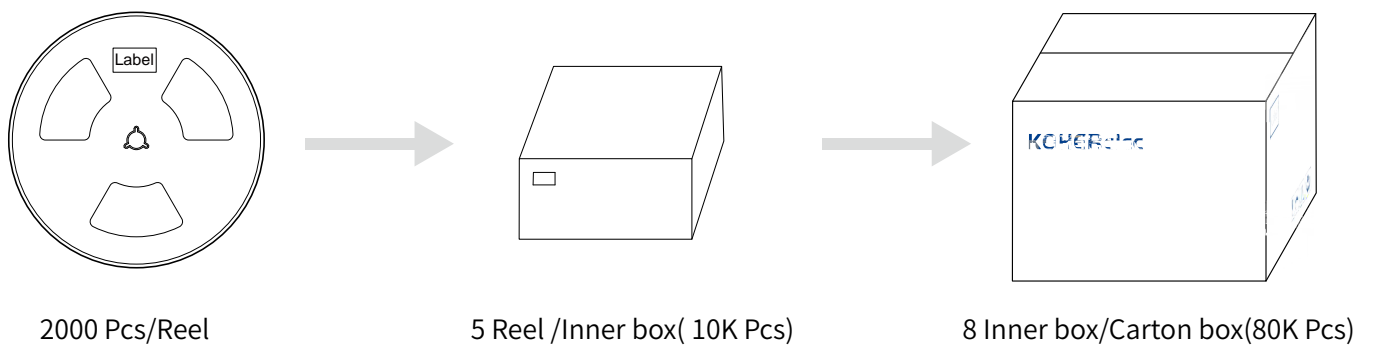

2000 Pcs/Reel

5 Reel /Inner box( 10K Pcs)

8 Inner box/Carton box(80K Pcs)

## Cautions and Warnings:

### Storage Conditions:

- 
- 
- 

### Operation Instructions: